

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113644 A1

(51) International Patent Classification⁷: E04F 19/04, E04H 09/16, E04B 01/72

(74) Agent: PULLEN, Kevin; Aardvark Patent & Trade Mark Services, PO Box 241, Landsborough, QLD 4550 (AU).

(21) International Application Number: PCT/AU2004/000817

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AB, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 23 June 2004 (23.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003903193 24 June 2003 (24.06.2003) AU

(71) Applicant (*for all designated States except US*): TERM-AVIEW PTY LTD [AU/AU]; P O Box 6112, Gold Coast MC, QLD 9726 (AU).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): LAVELL, Peter, Maxwell [AU/AU]; 101 Tallow Wood Drive, Kuluin, QLD 4558 (AU).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

{Continued on next page}

(54) Title: BUILDING WALL STRUCTURE

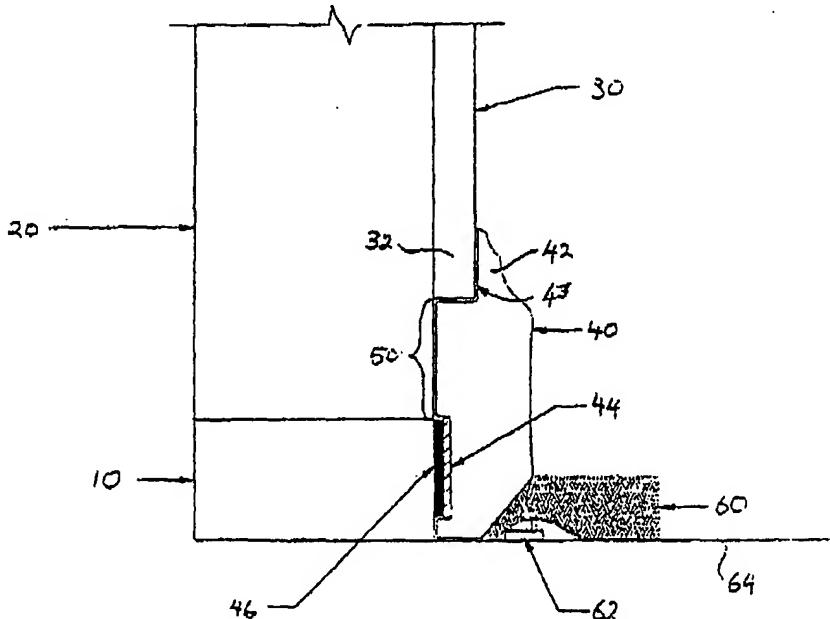

WO 2004/113644 A1

(57) Abstract: A removable wall skirting system is disclosed. In a wall structure where an interior wall cladding (30) is carried by a frame and in which a gap (50) is provided between a bottom edge of the cladding and a bottom wall frame member (10) of the frame, the removable wall skirting system covers this gap (50) but allows easier detection of termite activity within the wall structure. Various means of removably attaching the wall skirting are disclosed including magnetic coupling (44,46), clips (47), and rail (70) and slot (72).